

FortiSwitch™ Campus Core and Data Center

FortiSwitch FS-1024D, FS-1024E, FS-T1024E, FS-1048E, FS-3032E, FS-2048F

Available in



Appliance



Highlights


- High throughput with low latency
- Standalone or Integrated deployment options
- Zero-touch deployment
- On premise and cloud based management
- Intuitive management
- Access control and policy enforcement
- Scalable and flexible
- Dual hot-swappable power supplies
- Up to 48 access ports in a compact 1 RU form

The FortiSwitch™ campus core and data center family excel in performance, security, and resiliency, making them the optimal choice for both campus core and data center networking needs.

The proliferation of virtualization, cloud computing, and the increasing volume of data generated by users and IoT devices has necessitated dense high-bandwidth Ethernet networking and aggregation. In these environments, the paramount concerns are data security, performance, and resiliency. These dynamic settings demand efficient network management, monitoring, and optimization efforts while simplifying overall network complexity. The FortiSwitch campus core and data center switching architecture empowers network administrators with the requisite performance, control, and manageability for these demanding scenarios. Its seamless security integration and user-friendly management interface establish a robust foundation for your next-generation campus core or data center.

Secure Networking with FortiLink

FortiLink is an innovative proprietary management protocol, enabling seamless integration and centralized management between a FortiGate Next-Generation Firewall and the FortiSwitch Ethernet switching platform. FortiLink transforms the FortiSwitch into a logical extension of the FortiGate, streamlining the management of the both Ethernet data center and network security functions via unified interface. Offering high performance with low latency, FortiGate NGFW and FortiSwitch campus core and data center switching can support the demands of high-speed traffic inspection and segmentation.

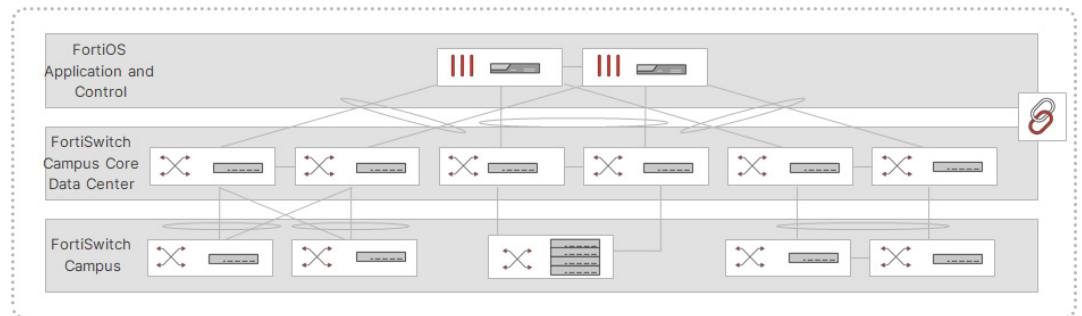

Segmentation and Policy Enforcement

FortiSwitch campus core and data center switching architecture can augment and further the security policies at the FortiSwitch access switch layer and enable high speed data traffic segmentation through FortiLink. This process grants IT administrators control over traffic within segments and limits threat exposure. Policy enforcement is simplified, while next-generation firewall (NGFW)-level policies ensure effective security at the core of your network.

SASE

The FortiSwitch enterprise architecture establishes a foundation for zero-trust network access (ZTNA) and secure access service edge (SASE), offering flexibility in deploying the desired level of security at the network edge.


Operational Simplicity

FortiSwitch switching architecture enables secure deployment and management within minutes through zero-touch deployment. Whether in standalone or FortiLink mode, automation and orchestration offer intuitive workflows and unified views for provisioning, management, and optimization, accessible through both FortiCloud and on-premises management.


Centralized management provides a unified, single view encompassing both the LAN and security, ensuring a consistent user experience that optimizes operational efficiency while simplifying management, optimization, and troubleshooting. This activity results in a reduced mean time to repair for both network and security issues.

Scalable and Flexible Campus Core and Data Center

FortiSwitch enterprise architecture scales effortlessly to meet the demands of today's next-generation campus cores and data centers, all without compromising on security. Supporting up to 48 ports within a compact 1 RU form factor, FortiSwitch minimizes rack space usage while delivering the requisite performance and scalability. Each switch series in the campus core and data center family offers models that enable the administrator to choose the appropriate media for their environment through a wide range of Fortinet transceivers. This feature also applies to the uplinks, with speeds up to 100 GE supporting various media.

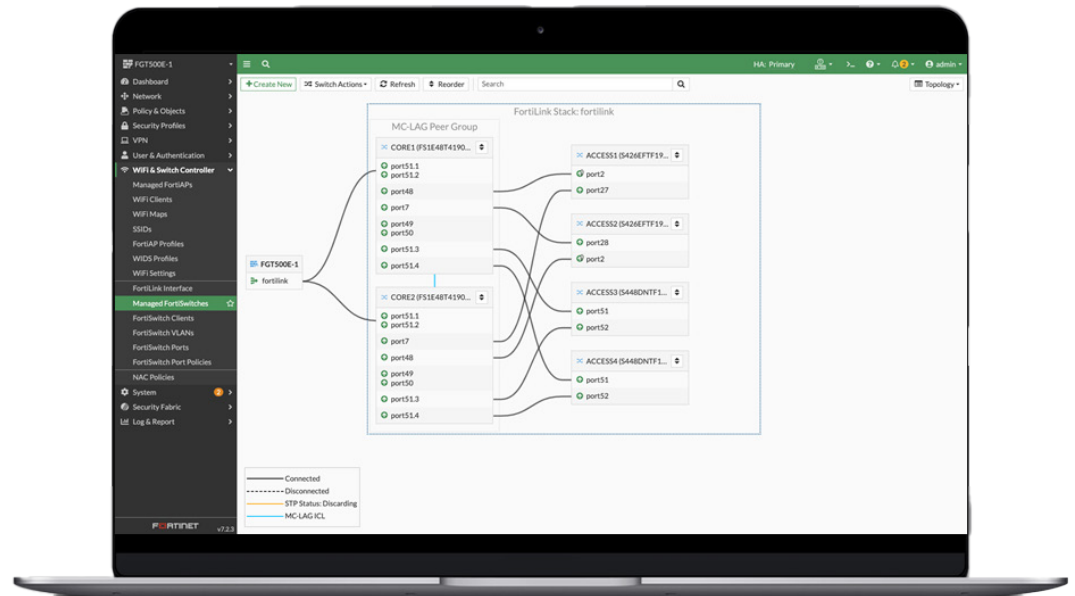


Campus Core and Data Center FortiOS

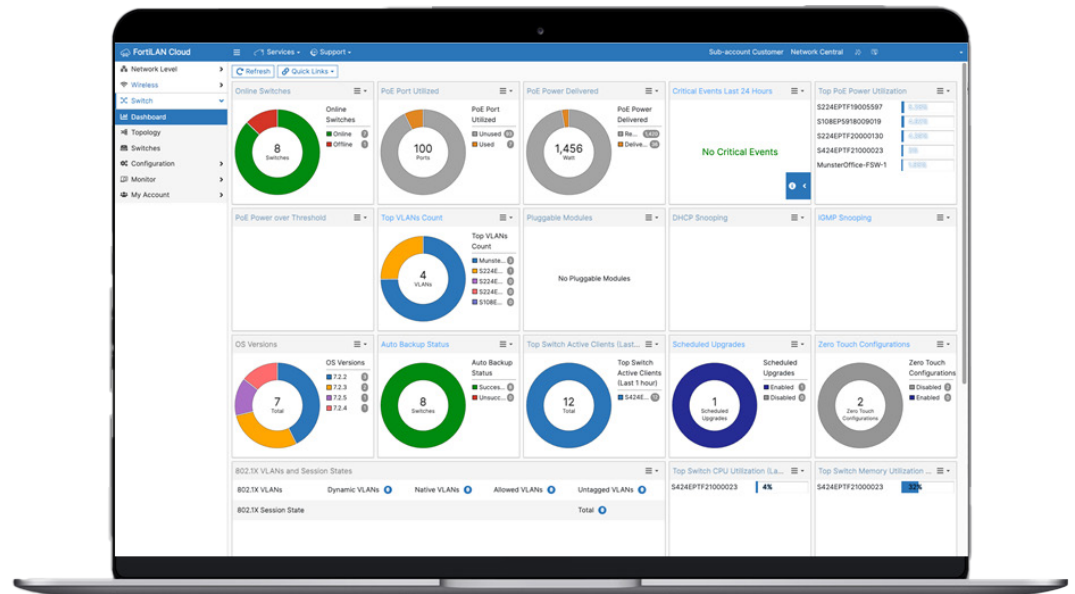

Campus Core and Data Center Cloud




Hardware

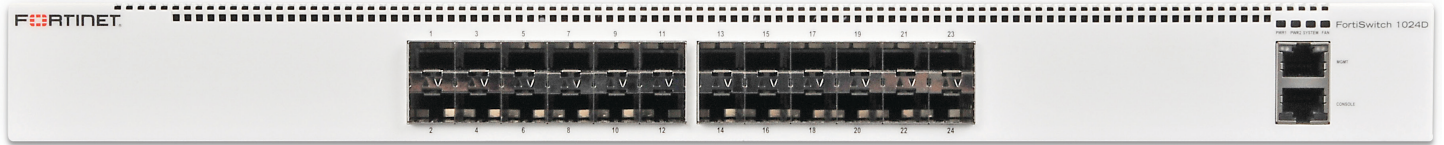

FortiSwitch 1024D — front




FortiSwitch 1024D — back

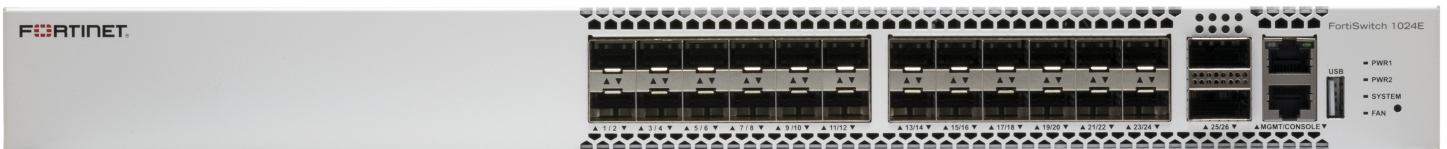

FortiSwitch 1024E — front



FortiSwitch 1024E — back

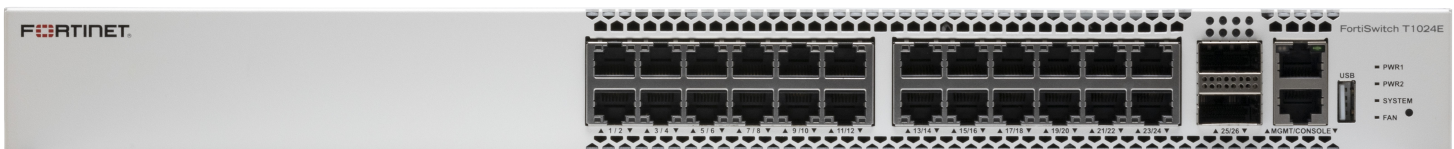


FortiSwitch T1024E — front



FortiSwitch T1024E — back



Hardware

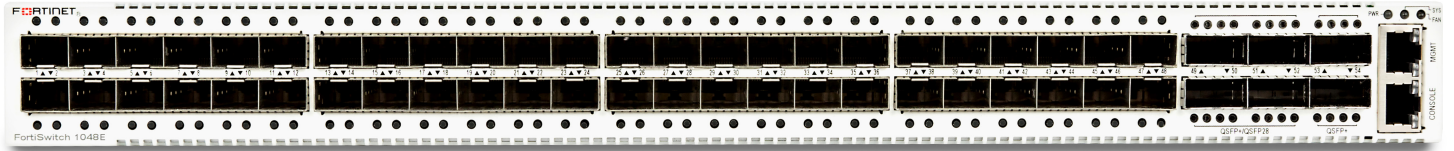

FortiSwitch 1048E — front



FortiSwitch 1048E — back



FortiSwitch 3032E — front



FortiSwitch 3032E — back



FortiSwitch 2048F — front



FortiSwitch 2048F — back



Features

FORTISWITCH D/E/F-SERIES FORTILINK MODE (WITH FORTIGATE)	
Management and Configuration	
Auto Discovery of Multiple Switches	Yes
Automated Detection and Recommendations	Yes
Centralized VLAN Configuration	Yes
Dynamic Port Profiles for FortiSwitch ports	Yes
FortiLink Stacking (Auto Inter-Switch Links)	Yes
FortiLink Secure Fabric	Yes
IGMP Snooping	Yes
L3 Routing and Services	Yes (FortiGate)
Link Aggregation Configuration	Yes
LLDP/MED	Yes
Number of Managed Switches per FortiGate	8 to 300 Depending on FortiGate Model (Please refer to admin-guide)
Policy-Based Routing	Yes (FortiGate)
Provision firmware upon authorization	Yes
Software Upgrade of Switches	Yes
Spanning Tree	Yes
Switch POE Control	Yes
Virtual Domain	Yes (FortiGate)
Health Monitoring	Yes
Security and Visibility	
802.1X Authentication (Port-based, MAC-Based, MAB)	Yes
Block Intra-VLAN Traffic	Yes
Device Detection	Yes
DHCP Snooping	Yes
FortiGuard IoT identification	Yes
FortiSwitch recommendations in Security Rating	Yes
Host Quarantine on Switch Port	Yes
Integrated FortiGate Network Access Control (NAC) function	Yes
FortiSwitch VLANs over VXLAN	Yes
MAC Black/White Listing	Yes (FortiGate)
Network Device Detection	Yes
Policy Control of Users and Devices	Yes (FortiGate)
Switch Controller traffic collector	Yes
Syslog Collection	Yes
Port Statistics	Yes
Clients Monitoring	Yes
UTM Features	
Firewall	Yes (FortiGate)
IPC, AV, Application Control, Botnet	Yes (FortiGate)
Quality for Service Egress Priority Tagging	Yes
Quality for Service Explicit Congestion Notification	Yes
High Availability	
Active-Active Split LAG from FortiGate to FortiSwitches for Advanced Redundancy	Yes
LAG Support for FortiLink Connection	Yes
Support FortiLink FortiGate in HA Cluster	Yes



Features

	FS-1024D	FS-1024E/FS-T1024E	FS-1048E	FS-2048F	FS-3032E
Layer 2					
Auto-Negotiation for Port Speed and Duplex	Yes	Yes	Yes	Yes	Yes
Auto Topology	Yes	Yes	Yes	Yes	Yes
Edge Port / Port Fast	Yes	Yes	Yes	Yes	Yes
IEEE 802.1ad QnQ	Yes	Yes	Yes	Yes	Yes
IEEE 802.1AX Link Aggregation	Yes	Yes	Yes	Yes	Yes
IEEE 802.1D MAC Bridging/STP	Yes	Yes	Yes	Yes	Yes
IEEE 802.1Q VLAN Tagging	Yes	Yes	Yes	Yes	Yes
IEEE 802.1Qbb Priority-based Flow Control	Yes	Yes	Yes	Yes	Yes
IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)	Yes	Yes	Yes	Yes	Yes
IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)	Yes	Yes	Yes	Yes	Yes
IEEE 802.3 CSMA/CD Access Method and Physical Layer Specifications	Yes	Yes	Yes	Yes	Yes
IEEE 802.3ab 1000Base-T	Yes	Yes	Yes	Yes	Yes
IEEE 802.3ad Link Aggregation with LACP	Yes	Yes	Yes	Yes	Yes
IEEE 802.3ae 10 Gigabit Ethernet	Yes	Yes	Yes	Yes	Yes
IEEE 802.3ba, 802.3bj, 802.3bm 40 and 100 Gigabit Ethernet	No	Yes	Yes	Yes	Yes
IEEE 802.3by 25 Gigabit Ethernet	No	Yes	Yes	Yes	Yes
IEEE 802.3bz Multi Gigabit Ethernet	No	Yes	No	No	No
IEEE 802.3u 100Base-TX	Yes	No / Yes	No	No	Yes
IEEE 802.3x Flow Control and Back-pressure	Yes	Yes	Yes	Yes	Yes
IEEE 802.3z 1000Base-SX/LX	Yes	Yes	Yes	Yes	Yes
Ingress Pause Metering	Yes	Yes	Yes	Yes	No
Jumbo Frames	Yes	Yes	Yes	Yes	Yes
LAG Min/Max Bundle	Yes	Yes	Yes	Yes	Yes
Loop Guard	Yes	Yes	Yes	Yes	Yes
MAC, IP, Ethertype-based VLANs	Yes	Yes	Yes	Yes	Yes
PHY Forward Error Correction	No	Yes	Yes	Yes	Yes
Private VLAN	Yes	Yes	Yes	Yes	Yes
Rapid PVST Interoperation	Yes	Yes	Yes	Yes	Yes
Spanning Tree Instances (MSTP/CST)	32/1	32/1	32/1	32/1	32/1
Split Port	No	No	Yes	No	Yes
Storm Control	Yes	Yes	Yes	Yes	Yes
STP BPDU Guard	Yes	Yes	Yes	Yes	Yes
STP Root Guard	Yes	Yes	Yes	Yes	Yes
Unicast/Multicast traffic balance over trunking port (dst-ip, dst-mac, src-dst-ip, src-dst-mac, src-ip, src-mac)	Yes	Yes	Yes	Yes	Yes
Virtual-Wire	Yes	Yes	Yes	Yes	Yes
VLAN Mapping	Yes	Yes	Yes	Yes	Yes
Dynamically shared packet buffers	Yes	Yes	Yes	Yes	Yes



Features

	FS-1024D	FS-1024E / FS-T1024E	FS-1048E	FS-2048F	FS-3032E
Layer 3					
Bidirectional Forwarding Detection (BFD)	Yes	Yes	Yes	Yes	Yes
DHCP Relay	Yes	Yes	Yes	Yes	Yes
DHCP Server	Yes	Yes	Yes	Yes	Yes
Dynamic Routing Protocols (IPv4/IPv6)*	OSPF, RIP, VRRP, BGP, ISIS	OSPF, RIP, VRRP, BGP, ISIS	OSPF, RIP, VRRP, BGP, ISIS	OSPF, RIP, VRRP, BGP, ISIS	OSPF, RIP, VRRP, BGP, ISIS
ECMP	Yes	Yes	Yes	Yes	Yes
Filtering Routemaps based on routing protocol	Yes	Yes	Yes	Yes	Yes
IGMP Proxy / Querier	Yes	Yes	Yes	Yes	Yes
IGMP Snooping	Yes	Yes	Yes	Yes	Yes
IP Conflict Detection and Notification	Yes	Yes	Yes	Yes	Yes
IPv6 Route Filtering	Yes	Yes	Yes	Yes	Yes
L3 Host Entries	16K	24K	32K	16k	32K
MLD Proxy / Querier	Yes	Yes	Yes	Yes	Yes
MLD Snooping	Yes	Yes	Yes	Yes	Yes
Multicast Protocols*	PIM-SSM	PIM-SSM	PIM-SSM	PIM-SSM	PIM-SSM
Multicast Route Entries*	4k	8k	8k	8k	8k
Policy-based Routing*	Yes	Yes	Yes	Yes	Yes
Route Entries (IPv4/IPv6)	16k/8k	24k/12k	16k/8k	16k/8k	8k/4k
Static Routing (Hardware-based)	Yes	Yes	Yes	Yes	Yes
Unicast Reverse Path Forwarding (uRPF)	Yes	Yes	Yes	Yes	Yes
VRF*	Yes	Yes	Yes	Yes	Yes
VXLAN	No	Yes	Yes	Yes	Yes
BGP Ethernet VPN	No	Yes	Yes	Yes	Yes
Security and Visibility					
ACL	Yes, 2K entries	Yes, 3K	Yes, 4K entries	Yes, 3K entries	Yes, 1K entries
ACL Multiple Ingress	Yes	Yes	Yes	Yes	Yes
ACL Multistage	Yes	Yes	Yes	Yes	Yes
ACL Schedule	Yes	Yes	Yes	Yes	Yes
Admin Authentication Via RFC 2865 RADIUS	Yes	Yes	Yes	Yes	Yes
Assign VLANs via Radius attributes (RFC 4675)	Yes	Yes	Yes	Yes	Yes
DHCP-Snooping	Yes	Yes	Yes	Yes	Yes
Dynamic ARP Inspection	Yes	Yes	Yes	Yes	Yes
FIPS 140-2 (level 2) support	No	Yes	Yes	Yes	Yes
Flow Export (NetFlow and IPFIX)	Yes	Yes	Yes	Yes	Yes
IEEE 802.1ab Link Layer Discovery Protocol (LLDP)	Yes	Yes	Yes	Yes	Yes
IEEE 802.1ab LLDP-MED	Yes	Yes	Yes	Yes	Yes
IEEE 802.1ae MAC Security (MAC Sec)	No	Yes	No	No	No
IEEE 802.1X Authentication MAC-based	Yes	Yes	Yes	Yes	Yes
IEEE 802.1X Authentication Port-based	Yes	Yes	Yes	Yes	Yes
IEEE 802.1X Dynamic VLAN Assignment	Yes	Yes	Yes	Yes	Yes
IEEE 802.1X EAP Pass-Through	Yes	Yes	Yes	Yes	Yes
IEEE 802.1X Guest and Fallback VLAN	Yes	Yes	Yes	Yes	Yes
IEEE 802.1X MAC Access Bypass (MAB)	Yes	Yes	Yes	Yes	Yes
IEEE 802.1X Open Auth	Yes	Yes	Yes	Yes	Yes
IP Source Guard	Yes	Yes	Yes	Yes	Yes
IPv6 RA Guard	Yes	Yes	Yes	Yes	Yes
LLDP-MED ELIN support	Yes	Yes	Yes	Yes	Yes
MAC-IP Binding	Yes	Yes	Yes	Yes	Yes
Port Mirroring	Yes	Yes	Yes	Yes	Yes
RADIUS Accounting	Yes	Yes	Yes	Yes	Yes
RADIUS CoA	Yes	Yes	Yes	Yes	Yes
sFlow	Yes	Yes	Yes	Yes	Yes
Sticky MAC	Yes	Yes	Yes	Yes	Yes
Wake on LAN	Yes	Yes	Yes	Yes	Yes

* Requires 'Advanced Features' License



Features

	FS-1024D	FS-1024E / FS-T1024E	FS-1048E	FS-2048F	FS-3032E
High Availability					
Multi-Chassis Link Aggregation (MCLAG)	Yes	Yes	Yes	Yes	Yes
Multi-Stage Load Balancing	Yes	Yes	Yes	Yes	Yes
Quality of Service					
Egress Priority Tagging	Yes	Yes	Yes	Yes	Yes
Explicit Congestion Notification	Yes	Yes	Yes	Yes	Yes
IEEE 802.1p Based Priority Queuing	Yes	Yes	Yes	Yes	Yes
IP TOS/DSCP Based Priority Queuing	Yes	Yes	Yes	Yes	Yes
Percentage Rate Control	Yes	Yes	Yes	Yes	Yes
Management					
Automation Stitches	Yes	Yes	Yes	Yes	Yes
Display Average Bandwidth and Allow Sorting on Physical Port / Interface Traffic	Yes	Yes	Yes	Yes	Yes
Dual Firmware Support	Yes	Yes	Yes	Yes	Yes
HTTP / HTTPS	Yes	Yes	Yes	Yes	Yes
IPv4 and IPv6 Management	Yes	Yes	Yes	Yes	Yes
Link Monitor	Yes	Yes	Yes	Yes	Yes
Managed from FortiGate	Yes	Yes	Yes	Yes	Yes
Packet Capture	Yes	Yes	Yes	Yes	Yes
RMON Group 1	Yes	Yes	Yes	Yes	Yes
SNMP v1/v2c/v3	Yes	Yes	Yes	Yes	Yes
SNMP v3 traps	Yes	Yes	Yes	Yes	Yes
SNTP	Yes	Yes	Yes	Yes	Yes
Software download/upload: SFTP/TFTP/FTP/GUI	Yes	Yes	Yes	Yes	Yes
SPAN, RSPAN, and ERSPAN	Yes	Yes	Yes	Yes	Yes
Standard CLI and web GUI interface	Yes	Yes	Yes	Yes	Yes
Support for HTTP REST APIs for Configuration and Monitoring	Yes	Yes	Yes	Yes	Yes
Syslog UDP/TCP	Yes	Yes	Yes	Yes	Yes
System Alias Command	Yes	Yes	Yes	Yes	Yes
System Temperature and Alert	Yes	Yes	Yes	Yes	Yes
Telnet / SSH	Yes	Yes	Yes	Yes	Yes
Services					
IEEE 1588 PTP (Transparent Clock)	No	Yes	Yes	Yes	Yes



RFC Compliance

RFC and MIB Support*

BFD

- RFC 5880: Bidirectional Forwarding Detection (BFD)
- RFC 5881: Bidirectional Forwarding Detection (BFD) for IPv4 and IPv6 (Single Hop)
- RFC 5882: Generic Application of Bidirectional Forwarding Detection (BFD)

BGP

- RFC 1771: A Border Gateway Protocol 4 (BGP-4)
- RFC 1965: Autonomous System Confederations for BGP
- RFC 1997: BGP Communities Attribute
- RFC 2545: Use of BGP-4 Multiprotocol Extensions for IPv6 Inter-Domain Routing
- RFC 2796: BGP Route Reflection - An Alternative to Full Mesh IBGP
- RFC 2842: Capabilities Advertisement with BGP-4
- RFC 2858: Multiprotocol Extensions for BGP-4
- RFC 4271: BGP-4
- RFC 6286: Autonomous-System-Wide Unique BGP Identifier for BGP-4
- RFC 6608: Subcodes for BGP Finite State Machine Error
- RFC 6793: BGP Support for Four-Octet Autonomous System (AS) Number Space
- RFC 7606: Revised Error Handling for BGP UPDATE Messages
- RFC 7607: Codification of AS 0 Processing
- RFC 7705: Autonomous System Migration Mechanisms and Their Effects on the BGP AS_PATH Attribute
- RFC 8212: Default External BGP (EBGP) Route Propagation Behavior without Policies
- RFC 8654: Extended Message Support for BGP

DHCP

- RFC 2131: Dynamic Host Configuration Protocol
- RFC 3046: DHCP Relay Agent Information Option
- RFC 7513: Source Address Validation Improvement (SAVI) Solution for DHCP

IP/IPv4

- RFC 2697: A Single Rate Three Color Marker
- RFC 3168: The Addition of Explicit Congestion Notification (ECN) to IP
- RFC 5227: IPv4 Address Conflict Detection
- RFC 5517: Cisco Systems' Private VLANs: Scalable Security in a Multi-Client Environment
- RFC 7039: Source Address Validation Improvement (SAVI) Framework

RFC and MIB Support*

IP Multicast

- RFC 2362: Protocol Independent Multicast-Sparse Mode (PIM-SM): Protocol Specification
- RFC 2710: Multicast Listener Discovery (MLD) for IPv6 (MLDv1)
- RFC 4541: Considerations for Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) Snooping Switches
- RFC 4605: Internet Group Management Protocol (IGMP)/Multicast Listener Discovery (MLD)-Based Multicast Forwarding ("IGMP/MLD Proxying")
- RFC 4607: Source-Specific Multicast for IP

IPv6

- RFC 2464: Transmission of IPv6 Packets over Ethernet Networks: Transmission of IPv6 Packets over Ethernet Networks
- RFC 2474: Definition of the Differentiated Services Field (DS Field) in the and IPv6 Headers (DSCP)
- RFC 2893: Transition Mechanisms for IPv6 Hosts and Routers
- RFC 4213: Basic Transition Mechanisms for IPv6 Hosts and Router
- RFC 4291: IP Version 6 Addressing Architecture
- RFC 4443: Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6) Specification
- RFC 4861: Neighbor Discovery for IP version 6 (IPv6)
- RFC 4862: IPv6 Stateless Address Auto configuration
- RFC 5095: Deprecation of Type 0 Routing Headers in IPv6
- RFC 6724: Default Address Selection for Internet Protocol version 6 (IPv6)
- RFC 7113: IPv6 RA Guard
- RFC 8200: Internet Protocol, Version 6 (IPv6) Specification
- RFC 8201: Path MTU Discovery for IP version 6

IS-IS

- RFC 1195: Use of OSI IS-IS for Routing in TCP/IP and Dual Environments
- RFC 5308: Routing IPv6 with IS-IS

MIB

- RFC 1213: MIB II parts that apply to FortiSwitch 100 units
- RFC 1354: IP Forwarding Table MIB
- RFC 1493: Bridge MIB
- RFC 1573: SNMP MIB II
- RFC 1643: Ethernet-like Interface MIB

* RFC and MIB supported by FortiSwitch Operating System. Check feature matrix in administration guide for model specific support.



RFC Compliance

RFC and MIB Support*

MIB

RFC 1724: RIPv2-MIB
RFC 1850: OSPF Version 2 Management Information Base
RFC 2233: The Interfaces Group MIB using SMIv2
RFC 2618: Radius-Auth-Client-MIB
RFC 2620: Radius-Acc-Client-MIB
RFC 2674: Definitions of Managed Objects for Bridges with Traffic Classes, Multicast Filtering and Virtual LAN extensions
RFC 2787: Definitions of Managed Objects for the Virtual Router Redundancy Protocol
RFC 2819: Remote Network Monitoring Management Information Base
RFC 2863: The Interfaces Group MIB
RFC 2932: IPv4 Multicast Routing MIB
RFC 2934: Protocol Independent Multicast MIB for IPv4
RFC 3289: Management Information Base for the Differentiated Services Architecture
RFC 3433: Entity Sensor Management Information Base
RFC 3621: Power Ethernet MIB
RFC 6933: Entity MIB (Version 4)

OSPF

RFC 1583: OSPF version 2
RFC 1765: OSPF Database Overflow
RFC 2328: OSPF version 2
RFC 2370: The OSPF Opaque LSA Option
RFC 2740: OSPF for IPv6
RFC 3101: The OSPF Not-So-Stubby Area (NSSA) Option
RFC 3137: OSPF Stub Router Advertisement
RFC 3623: OSPF Graceful Restart
RFC 5340: OSPF for IPv6 (OSPFv3)
RFC 5709: OSPFv2 HMAC-SHA Cryptographic Authentication
RFC 6549: OSPFv2 Multi-Instance Extensions
RFC 6845: OSPF Hybrid Broadcast and Point-to-Multipoint Interface Type
RFC 6860: Hiding Transit-Only Networks in OSPF
RFC 7474: Security Extension for OSPFv2 When Using Manual Key Management
RFC 7503: OSPF for IPv6
RFC 8042: CCITT Draft Recommendation T.4
RFC 8362: OSPFv3 Link State Advertisement (LSA) Extensibility

RFC and MIB Support*

OTHER

RFC 2030: SNTP
RFC 3176: InMon Corporation's sFlow: A Method for Monitoring Traffic in Switched and Routed Networks
RFC 3768: VRRP
RFC 3954: Cisco Systems NetFlow Services Export Version 9
RFC 5101: Specification of the IP Flow Information Export (IPFIX) Protocol for the Exchange of Flow Information
RFC 5798: VRRPv3 (IPv4 and IPv6)

RADIUS

RFC 2865: Admin Authentication Using RADIUS
RFC 2866: RADIUS Accounting
RFC 4675: RADIUS Attributes for Virtual LAN and Priority Support
RFC 5176: Dynamic Authorization Extensions to Remote Authentication Dial In User Service (RADIUS)

RIP

RFC 1058: Routing Information Protocol
RFC 2080: RIPng for IPv6
RFC 2082: RIP-2 MD5 Authentication
RFC 2453: RIPv2
RFC 4822: RIPv2 Cryptographic Authentication

SNMP

RFC 1157: SNMPv1/v2c
RFC 2571: Architecture for Describing SNMP
RFC 2572: SNMP Message Processing and Dispatching
RFC 2573: SNMP Applications
RFC 2576: Coexistence between SNMP versions

VXLAN

RFC 7348: Virtual eXtensible Local Area Network (VXLAN)

* RFC and MIB supported by FortiSwitch Operating System. Check feature matrix in administration guide for model specific support.



Specifications

	FORTISWITCH 1024D	FORTISWITCH 1024E	FORTISWITCH T1024E
Hardware Specifications			
Total Network Interfaces	24x GE/10 GE SFP+ ports	24x GE/10GE SFP+ ports and 2x 40GE / 100GE QSFP+ / QSFP28 ports	24x 1G/2.5G/5G/10GBASE-T ports and 2x 40GE / 100GE QSFP+ / QSFP28 ports
10/100/1000 Service Ports	1	1	1
RJ-45 Serial Console Port	1	1	1
Form Factor	1 RU Rack Mount	1 RU Rack Mount	1 RU Rack Mount
System Specifications			
Switching Capacity (Duplex)	480 Gbps	880 Gbps	880 Gbps
Packets Per Second (Duplex) 64 bytes	714 Mpps	1309 Mpps	1309 Mpps
Mac Address Storage	128 K	64k	64k
Network Latency	< 800ns	~1μs	~1μs
VLANs Supported	4 K	4k	4k
IPv4/IPv6 Routing	Yes	Yes	Yes
Link Aggregation Group Size	Up to 24	Up to 24	Up to 24
Total Link Aggregation Groups	Up to number of ports	Up to number of ports	Up to number of ports
Queues/Port	8	8	8
Packet Buffers	9 MB	8 MB	8 MB
Memory	2GB DDR3	8GB DDR4	8GB DDR4
Flash	128MB NAND	32MB NOR	32MB NOR
Drive	—	8GB SSD	8GB SSD
Dimensions			
Height x Depth x Width (inches)	1.71 × 18.11 × 17.26	1.73 × 16.14 × 17.32	1.73 × 16.14 × 17.32
Height x Depth x Width (mm)	43.5 × 460 × 438.5	44 × 410 × 440	44 × 410 × 440
Weight	17.62 lbs (8 kg)	14.5 lbs (6.58 kg)	14.4 lbs (6.54 kg)
Environment			
Power Required	100–240V AC, 50–60 Hz	100–240V AC, 50–60 Hz	100–240V AC, 50–60 Hz
Power Consumption (Maximum)	up to 140 W	176 W	128 W
Power Supply	Dual hot swappable AC	Dual hot swappable AC	Dual hot swappable AC
Heat Dissipation	369.87 BTU/h	599.13 BTU/h	436.48 BTU/h
Operating Temperature	32°F to 104°F (0°C to 40°C)	32°F to 104°F (0°C to 40°C)	32°F to 104°F (0°C to 40°C)
Storage Temperature	-13°F to 158°F (-25°C to 70°C)	-13°F to 158°F (-25°C to 70°C)	-13°F to 158°F (-25°C to 70°C)
Humidity	10% to 90% RH non-condensing	10% to 90% RH non-condensing	10% to 90% RH non-condensing
Air Flow	Front to back	Front to back	Front to back
Noise Level	53.2 dBA	56 dBA	57.3 dBA
Mean Time Between Failures	> 10 years	> 10 years	> 10 years
Certification and Compliance			
FCC, CE, RCM, VCCI, BSMI, UL, CB, RoHS2			
Warranty			
Fortinet Warranty	Limited lifetime* warranty on all models		

* Fortinet Warranty Policy: <http://www.fortinet.com/doc/legal/EULA.pdf>



Specifications

	FORTISWITCH 1048E	FORTISWITCH 2048F	FORTISWITCH 3032E
Hardware Specifications			
Total Network Interfaces	48x GE/10 GE SFP+ ports and 6x 40 GE QSFP+ ports or 4x 100 GE QSFP28 ports	48x 1GE/10GE/25GE SFP28 ports 2x 1GE/10GE SFP+ ports 8x 40GE / 100GE QSFP28 ports	32x 40 GE / 100 GE QSFP+ / QSFP28 ports
10/100/1000 Service Ports	1	1	1
RJ-45 Serial Console Port	1	1	1
Form Factor	1 RU Rack Mount	1 RU Rack Mount	1 RU Rack Mount
System Specifications			
Switching Capacity (Duplex) *	1760 Gbps	4000 Gbps	6400 Gbps
Packets Per Second (Duplex) 64 bytes	1518 Mpps	4000 Mpps	5952 Mpps
Mac Address Storage	144 K	96k	72 K
Network Latency	< 800 ns	< 1 μs	< 1 μs
VLANs Supported	4 K	4k	4 K
IPv4/IPv6 Routing	Yes	Yes	Yes
Link Aggregation Group Size	Up to 48	Up to 48	Up to number of ports
Total Link Aggregation Groups	Up to number of ports	Up to number of ports	Up to number of ports
Queues/Port	8	8	8
Packet Buffers	12 MB	32 MB	16 MB
Memory	8GB DDR3	8GB DDR4	8GB DDR3
Flash	128MB NOR	8GB NAND	128MB NOR
Drive	128GB SSD	32GB SSD	128GB SSD
Dimensions			
Height x Depth x Width (inches)	1.69 × 18.11 × 17.26	1.71 × 18.11 × 17.26	1.69 × 18.11 × 17.26
Height x Depth x Width (mm)	43 × 460 × 438.5	43.5 × 460 × 438.5	43 × 460 × 438.5
Weight	18.96 lbs (8.6 kg)	21.78 lbs (9.88 kg)	19.34 lbs (8.77 kg)
Environment			
Power Required	100–240V AC, 50–60 Hz	100–240V AC, 50–60 Hz	100–240V AC, 50–60 Hz
Power Consumption (Maximum)	up to 181.7 W	175.7 W	up to 463.8 W
Power Supply	Dual hot swappable AC	Dual hot swappable AC	Dual hot swappable AC
Heat Dissipation	620.4 BTU/h	406 BTU/h	1582.5 BTU/h
Operating Temperature	32°F to 113°F (0°C to 45°C)	32°F to 104°F (0°C to 40°C)	32°F to 104°F (0°C to 40°C)
Storage Temperature	-4°F to 158°F (-20°C to 70°C)	-13°F to 158°F (-25°C to 70°C)	-4°F to 158°F (-20°C to 70°C)
Humidity	10% to 90% RH non-condensing	10% to 90% RH non-condensing	10% to 90% RH non-condensing
Air Flow	Front to back	Front to back	Front to back
Noise Level	59 dBA	69.36 dBA	69.1 dBA
Mean Time Between Failures	> 10 years	> 10 years	> 10 years
Certification and Compliance			
FCC, CE, RCM, VCCI, BSMI, UL, CB, RoHS2			
Warranty			
Fortinet Warranty			
Limited lifetime** warranty on all models			

* Full line rate with minimum packet size of 427 bytes on FS-1048E, 250 bytes on FS-3032E, and 110 bytes on FS-2048F when 2x10G ports are not in use

** Fortinet Warranty Policy: <http://www.fortinet.com/doc/legal/EULA.pdf>



Ordering Information

Product	SKU	Description
FortiSwitch 1024D	FS-1024D	Layer 2/3 FortiGate switch controller compatible switch with 24x GE/10 GE SFP/SFP+ slots. Dual AC power supplies.
FortiSwitch 1024E	FS-1024E	Layer 2/3 FortiGate switch controller compatible switch with 24x GE/10GE SFP/SFP+ slots and 2x 100GE QSFP28. Dual AC power supplies.
FortiSwitch T1024E	FS-T1024E	Layer 2/3 FortiGate switch controller compatible switch with 24x 1G/2.5G/5G/10GBase-T slots and 2 x 100GE QSFP28. Dual AC power supplies.
FortiSwitch 1048E	FS-1048E	Layer 2/3 FortiGate switch controller compatible switch with 48x GE/10 GE SFP/SFP+ slots and 6x 40 GE QSFP+ or 4x 100 GE QSFP28. Dual AC power supplies.
FortiSwitch-3032E	FS-3032E	Layer 2/3 FortiGate switch controller compatible switch with 32x 100 GE QSFP28, Dual AC power supplies.
FortiSwitch 2048F	FS-2048F	Layer 2/3 FortiGate switch controller compatible switch with 48x 25G SFP28 + 8x 100G QSFP28 + 2x 10G SFP+. Dual AC power supplies.
FortiLAN Cloud Management License	FC-10-FSW30-628-02-DD	FortiSwitch 1000 Series and Above FortiLAN Cloud Management SKU Including Forticare 24x7. Note, FortiCare only applicable when used with FortiLAN Cloud.
FortiGate Cloud Management*	FC-10-0030E-131-02-DD	FortiGate Cloud Management, Analysis and 1 Year Log Retention.
FortiSwitchManager Subscription License	FC1-10-SWMVM-258-01-DD	Subscription license for 10 FortiSwitch Units managed by FortiSwitchManager VM. 24x7 FortiCare support (for FSWM VM) included.
	FC2-10-SWMVM-258-01-DD	Subscription license for 100 FortiSwitch Units managed by FortiSwitchManager VM. 24x7 FortiCare support (for FSWM VM) included.
	FC3-10-SWMVM-258-01-DD	Subscription license for 1000 FortiSwitch Units managed by FortiSwitchManager VM. 24x7 FortiCare support (for FSWM VM) included.
Accessories		
FortiSwitch Advanced Features License	FS-SW-LIC-1000	SW License for FS-1000 Series Switches to activate Advanced Features.
	FS-SW-LIC-2000	SW License for FS-2000 Series Switches to activate Advanced Features.
	FS-SW-LIC-3000	SW License for FS-3000 Series Switches to activate Advanced Features.
AC Power Supply	FS-PSU-460	Spare AC power supply for FS-1048E/1024D.
	FS-PSU-800	Spare AC power supply for FS-3032E.
	FS-PSU-300	Spare AC power supply for FS-1024E and FS-T1024E


* When managing a FortiSwitch with a FortiGate via FortiGate Cloud, no additional license is necessary.

For details of Transceiver modules, see the [Fortinet Transceivers datasheet](#).



Fortinet Corporate Social Responsibility Policy

Fortinet is committed to driving progress and sustainability for all through cybersecurity, with respect for human rights and ethical business practices, making possible a digital world you can always trust. You represent and warrant to Fortinet that you will not use Fortinet's products and services to engage in, or support in any way, violations or abuses of human rights, including those involving illegal censorship, surveillance, detention, or excessive use of force. Users of Fortinet products are required to comply with the [Fortinet EULA](#) and report any suspected violations of the EULA via the procedures outlined in the [Fortinet Whistleblower Policy](#).

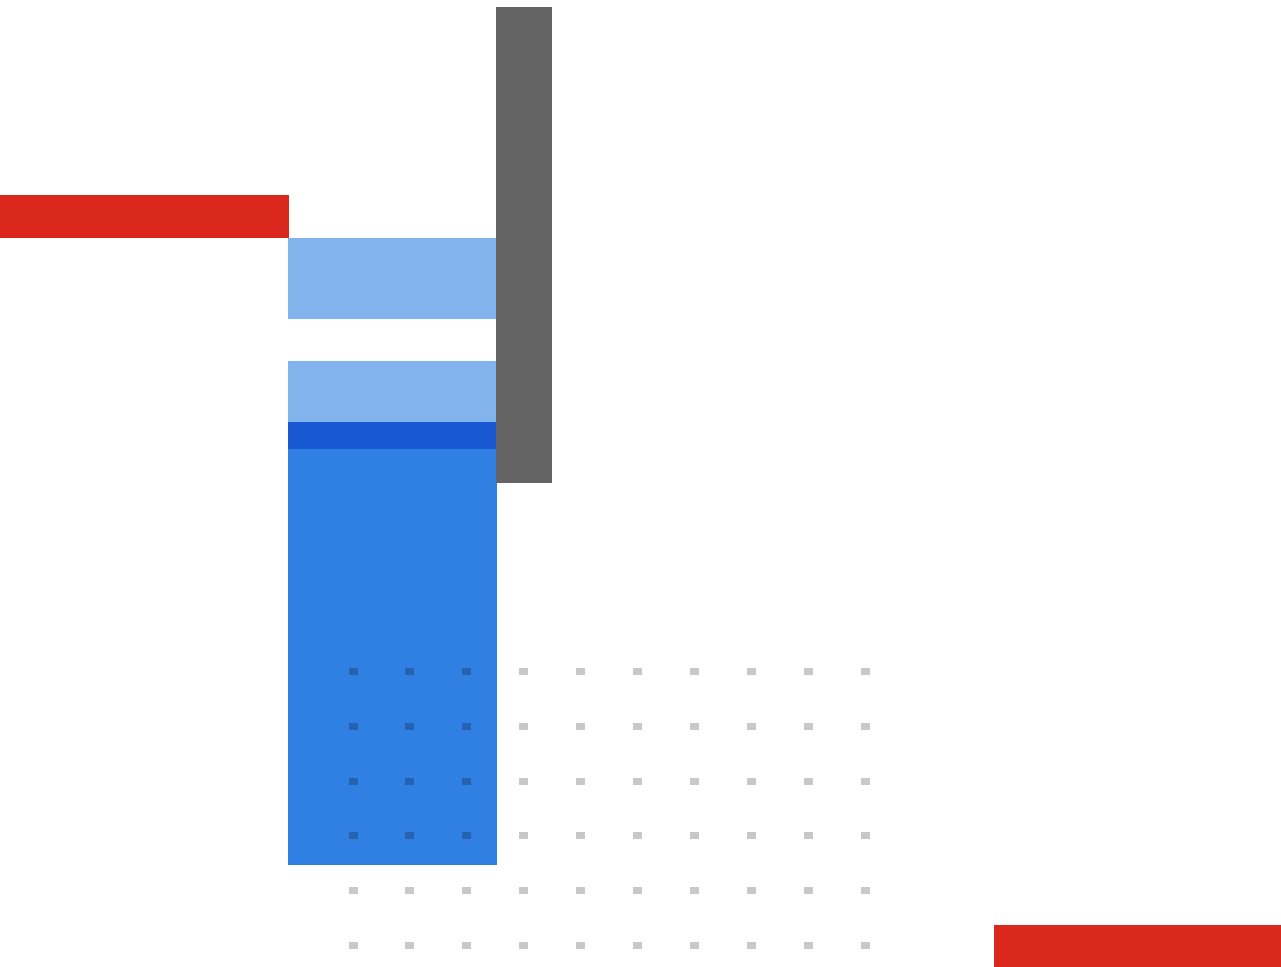

www.fortinet.com

Copyright © 2024 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's Chief Legal Officer, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.